



Scan for full manual

ACC3-12-SP Quick Start Guide


This guide helps you install and use your ACC3-12-SP for the first time.

Go to www.kramerav.com/downloads/ACC3-12-SP to download the latest user manual and check if firmware upgrades are available.

Step 1: Check what's in the box

- ACC3-12-SP 1:2 CAT Cable Splitter
- 1 Bracket set
- 4 Rubber feet
- 1 Quick start guide

Step 2: Get to know your ACC3-12-SP

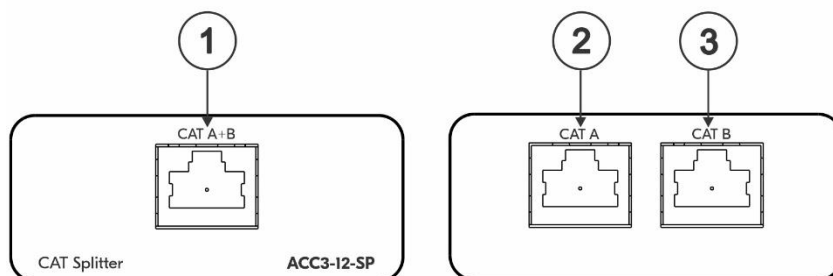


#	Feature	Function
1	CAT A+B RJ-45 Port	Connect to a compatible CAT transmitter (for example an SWT3-41-U-T) to send combined signals over the A+B port. <i>i</i> Make sure the Dual CAT extension is set to active via CAT transmitter embedded webpages.
2	CAT A RJ-45 Port	Connect to a compatible CAT receiver (for example an EXT3-UE-R , EXT3-U-R).
3	CAT B RJ-45 Port	Connect to a compatible CAT receiver (for example an EXT3-UE-R , EXT3-U-R).

Step 3: Mount ACC3-12-SP

Install ACC3-12-SP using one of the following methods:

- Attach the rubber feet and place the unit on a flat surface.
- Fasten a bracket (included) on each side of the unit and attach it to a flat surface (see www.kramerav.com/downloads/ACC3-12-SP).
- Mount the unit in a rack using the recommended rack adapter (see www.kramerav.com/product/ACC3-12-SP).



- Ensure that the environment (e.g., maximum ambient temperature & air flow) is compatible for the device.
- Avoid uneven mechanical loading.
- Appropriate consideration of equipment nameplate ratings should be used for avoiding overloading of the circuits.
- Reliable earthing of rack-mounted equipment should be maintained.

Step 4: Connect inputs and outputs

Always switch OFF the power on each device before connecting it to your ACC3-12-SP.

