

Synergy™ 10.1" All-In-One Touchpad Controller

SYN-TOUCH10



Quickstart Guide

WyreStorm recommends reading through this document in its entirety to become familiar with the product's features prior to starting the installation process.

IMPORTANT! Installation Requirements


- Read through the [Wiring and Connections](#) section for important wiring guidelines before creating or choosing premade cables.
- Visit the product page to download the latest firmware, document version, additional documentation, and configuration tools.
- The SYN-TOUCH10 is PoE compatible. To power the touchpad, simply plug it into a 802.3at compatible network switch. If the network switch is not PoE capable, a PoE injector (sold separately) can be used, as well as the included 12V PSU.

In the Box

- 1x SYN-TOUCH10 Touchpad
- 1x Table Top Stand
- 1x Wall Mount (US/UK/EU)
- 1x DC 12V PSU (US/UK/EU/AU)
- 4x Expansion Screws
- 4x Mounting Screws
- 1x M3L8 Hexagonal Screw
- 1x M3L8 Phillips Head Screw
- 1x Quickstart Guide

Port/Button Description Guide

Before installation, please make note of the ports, descriptions and locations.



Port/Button	Description
SD Card	Insert a SD card for loading an existing configuration file
Audio Out	Reserved
USB 2.0	Connect to a USB flash drive for loading existed configuration file
Serial	Reserved

Port/Button	Description
RJ45	LAN connection for PoE+ and Control
OTG	Reserved
DC	DC 12V power input for use if LAN connection does not support PoE
On/Off	Button to Power unit On/Off

Table and Wall Mount Dimensions


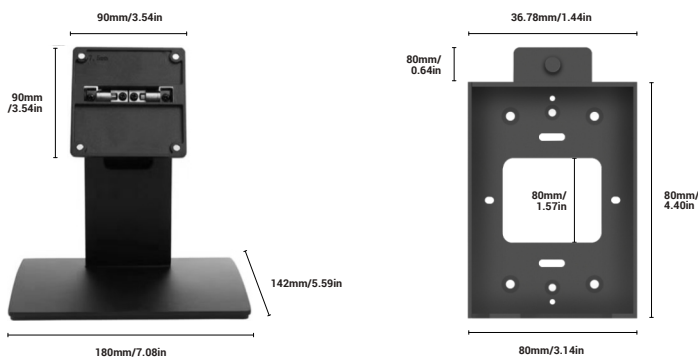


Table Mounting Installation

WyreStorm recommends that this section is read through in its entirety before to ensure proper installation and avoid damaging the equipment.




Use the four Mounting screws provided and place through the holes on the back of the table mount




Screw the four Expansion screws into the back of the SYN-TOUCH10

Wall Mounting Installation


WyreStorm recommends that this section is read through in its entirety before to ensure proper installation and avoid damaging the equipment.

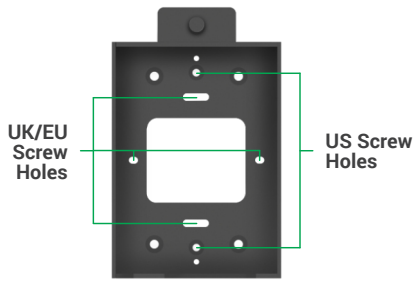

Note: Before installation, make note of the US and UK/EU screw holes shown in the graphic above for respective backboxes.



Once the respective backbox has been installed, use the mounting screws provided to attach the wall mount to back box.



To attach the SYN-TOUCH10, slot the mount key into the keyhole on the back of the tablet and use one of the provided M3L8 screws to secure in place

Wiring and Connections

WyreStorm recommends that all wiring for the installation is run and terminated prior to making connections to the switcher. Read through this section in its entirety before running or terminating any wires to ensure proper operation and to avoid damaging the equipment.

IMPORTANT! Wiring Guidelines

- The use of patch panels, wall plates, cable transmitters, kinks in cables, and electrical or environmental interference will have an adverse effect on signal transmission which may limit performance. Steps should be taken to minimize or remove these factors completely during installation for best results.
- WyreStorm recommends using pre-terminated RJ45 cables due to the complexity of these connector types. Using pre-terminated cables will ensure that these connections are accurate and will not interfere with the performance of the product.

Warranty Information

WyreStorm Technologies ProAV Corporation warrants that its products to be free from defects in material and workmanship under normal use for a period of five (5) years from the date of purchase. Refer to the Product Warranty page on wyrestorm.com for more details on our limited product warranty.

