

USB-C to C Superspeed Active Optical Cable

CAB-USBC-15



Quickstart Guide

💡 WyreStorm recommends reading through this document in its entirety to become familiar with the product's features prior to starting the installation process.




In the Box

- 1x CAB-USBC-15 Cable
- 1x Quickstart Guide

Wiring and Connections

⚠️ IMPORTANT! Installation Requirements

- Follow the labeling and the diagrams for connection to ensure proper operation.
- Due to the cables diameter, the cable cannot have a bend radius greater than 0.5cm/0.19in. Keep this mind when routing cables around objects and inside of walls.
- The cables have a max pull tension of 20kg/44lbs. Keep this in mind when routing the cable within cabinets or walls to avoid damaging the cable.

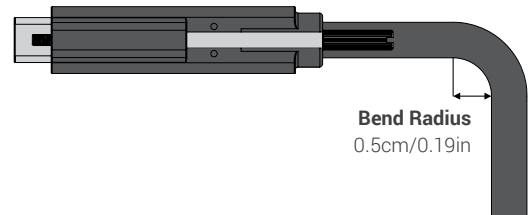

Audio and Video		
Video Resolution (Max)	1920x1080p @60Hz 3840x2160p @30Hz 8bit 4:4:4	15m/49ft
Maximum Pixel Clock	300Mhz	
Supported Standards	RGB USB USB Alt-Mode	
Communication and Control		
USB	USB 3.2 Gen 1 Superspeed 5Gbps	
Power		
Power Consumption	1100mW (5v input)	
Power Delivery	20V 3A (60w)	
Environmental		
Operating Temperature	14°F ~ 158°F (-10°C ~ 70°C) 0% ~ 85%, non-condensing	
Storage Temperature	-40°F ~ 185°F (-40°C ~ 85°C) 0% ~ 85%, non-condensing	
Max Cable Bend Radius	0.5cm/0.19in	
Max Pull Tension/Tensile Strength	20kg/44lbs (200n)	
Dimensions and Weight		
Length x Width x Height	Connector W/O Screw Lock: 56mm x 13.3mm x 8.6mm Connector with Screw Lock: 56mm x 13.3mm x 13.9mm	
Cable Diameter	6.5mm	
Regulatory		
Safety and Emission	CE FCC RoHS EAC RCM	

Note: WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.

Warranty Information

WyreStorm Technologies ProAV Corporation warrants that its products to be free from defects in material and workmanship under normal use for a period of five (5) years from the date of purchase. Refer to the Product Warranty page on wyrestorm.com for more details on our limited product warranty.

