


SCP PART#: SP-2.5/2-LSZH-BK-B2

Description:

Commercial Speaker Cable-2C/14AWG-LSZH-B2ca-s1a,d1,a2

B2ca Rated-2Cond/2.5mm2 (14AWG)Oxygen Free
 Copper,EN50575 B2ca-s1a,d1,a2 Low Smoke Zero
 Halogen,Indoor/Outdoor UV Sun Res Jkt

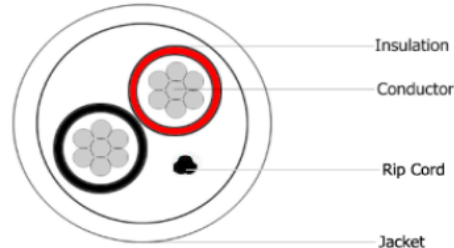

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	14AWG*2C 50standed
	Construction	0.25+/-0.008mm
Insulation	Material	LSZH
	AVG.Thickness	0.40mm
	Diameter	2.7+/-0.05mm
	Colors	Red,Black
Jacket	Material	LSZH
	Nom.Thickness	0.70mm
	Diameter	6.8 + /-0.30mm
	Rip Cord	Yes
	Color	Black(similar to RAL9004)

Electrical & Physical Characteristics

Operating Temperature Range		-20℃ ~ +80℃
Voltage Rating		300 V
Conductor DC resistance (20 ℃)		<=8.62 Ohms
Sheath Physical Properties		100 ℃*168h
Before Aging	Tensile Strength	>=10.0Mpa
	Elongation	>=125%
After Aging	Tensile Strength	>=8.0Mpa
	Elongation	>=100%

Markings (squares are just for identifying space numbers ,will not be printed)

STRUCTURED CABLE PRODUCTS -- SP-2.5/2-LSZH -- Commercial Speaker Cable / Audio Cable -- 2C/2.50mm2 (14AWG) 50x0.25mm Strand
 Oxygen Free Copper Indoor/Outdoor UV Sun Res LSZH JKT EN50575 B2ca-s1a,d1,a2 EU RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M
 MM/YY LOT # 0502248

Packaging

Approx Weight	Approx Dimension (Spool)	Package	Spools per pallet	Pallet weight
26.3kg/spool	34x22x32cm	305M/spool	27spools	710.75kg