




# AOPEN

an Acer Group Company

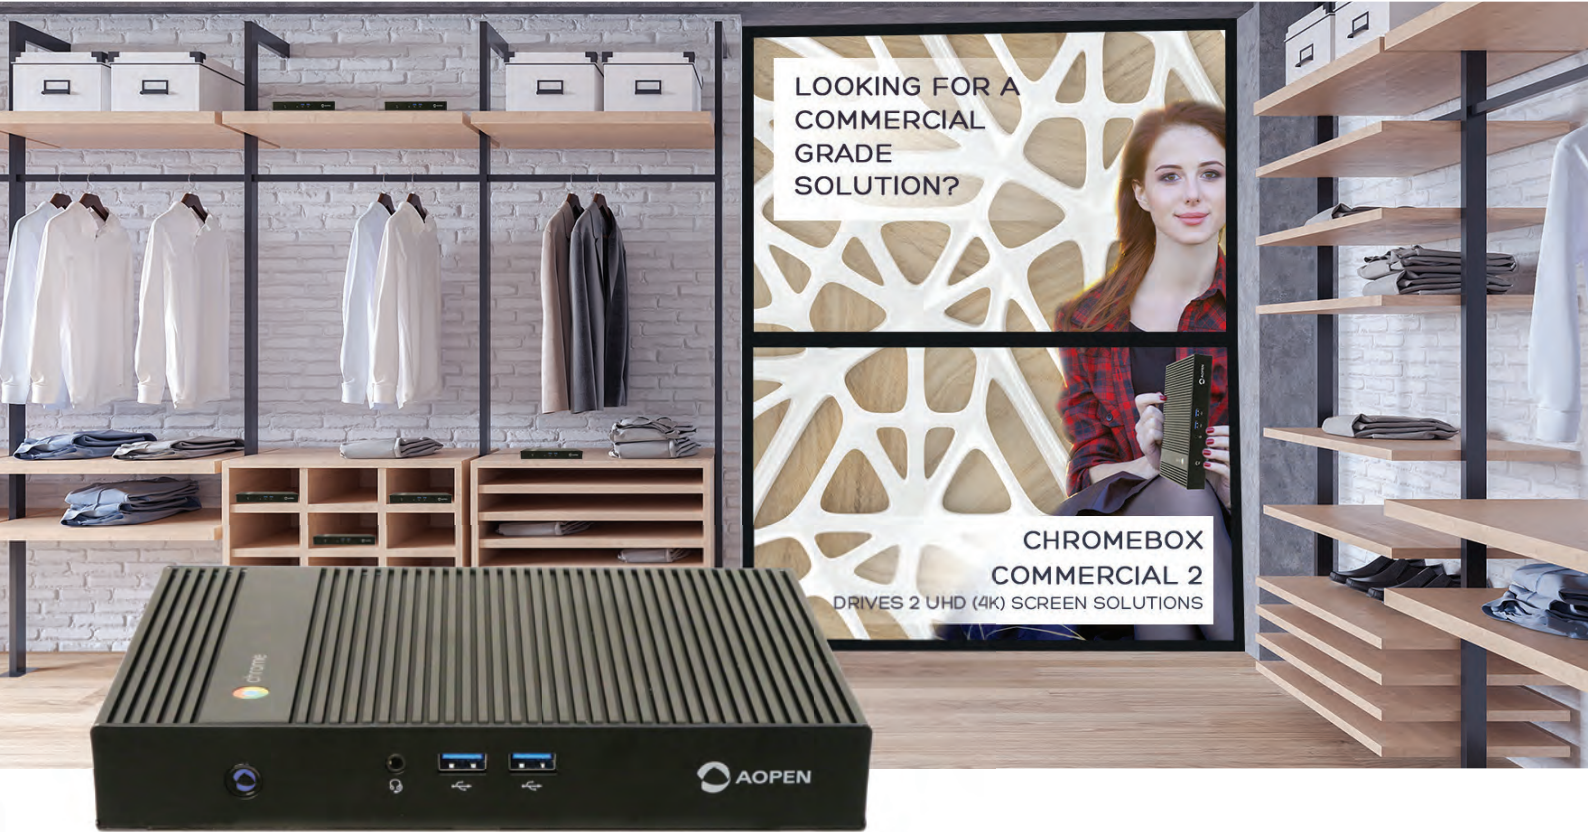

# Chromebox Commercial 2

*Powerful, Commercial Grade Chrome OS Device, that drives up to two UHD (4k) screens*

This Commercial Grade Chrome OS device is specifically designed for digital signage and kiosk applications.


The AOPEN Chromebox Commercial 2 is a highly reliable and powerful device that operates 24/7 under tough conditions (up to 40°C). It sets itself apart from any Chromebox, being the only commercial grade Chromebox. The Chromebox Commercial 2 is fanless and has the capability to run one UHD (4k) screen @60Hz, or two UHD (4k) screens @30Hz.

## **Chrome Device management**

Deployment and management of the devices have never been easier using Chrome Device Management. Use the signage app of your preference available via the Chrome Web Store to control what's on the screen.

## *The advantages of the Chromebox Commercial 2:*

- Runs 1 UHD (4k) display @60Hz or two UHD (4k) displays @30Hz
- 24/7 Operability in public spaces
- Small form factor for easy installment behind displays or integration in kiosks, comes with L-shaped mount
- The solid-state and fanless design ensure a first-rate performance in challenging or moving situations.
- AC Power Auto Recovery (APAR).
- Included dual band antenna offers a wide reach.
- The Chromebox Commercial 2 comes with a 3 year warranty. Extended warranty optional for 5 years.
- Options for kiosk and POS device extensions via commercial ports.
- Optional Chrome Device Management on request to save valuable time and thus costs on installation, programming and maintenance.

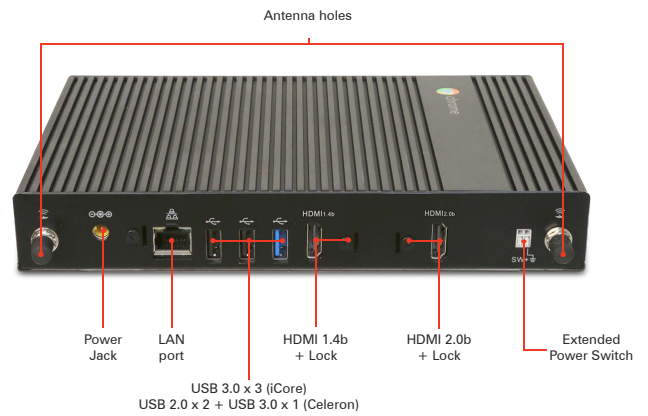

# Chromebox Commercial 2

## Specifications

<b>Feature</b>	First Commercial Grade and Fanless Chromebox to power 4K screens.
<b>Operating System</b>	Chrome OS
<b>Housing Material</b>	Aluminum / SECC
<b>Chassis Colour</b>	Black
<b>Dimensions</b>	W x H x D (mm)    213 x 147 x 32 mm
	W x H x D (inch)    8.39 x 5.79 x 1.26 inch
<b>Weight</b>	1.7 kg / 3.75 lb
<b>CPU/Chip set</b>	Type    Intel® Celeron 3865U / Intel® Core i3-8130
<b>Memory</b>	DDR4 4G
<b>Graphics</b>	Chip    Intel® HD Graphics Integrated on CPU
<b>Expansion slot</b>	M.2 Intel® 7265
<b>Audio</b>	Type    3.5mm Audio Jack x 1(combo)
	Channel    5.1
<b>LAN</b>	GbE LAN
<b>Storage</b>	SSD 32G
<b>Front Panel I/O</b>	USB 2.0 Port    -
	USB 3.0 Port    x 2
	Others    Audio Jack (Combo)

## Rear Panel I/O

DC Jack	x 1
HDMI Port	x 2 (+Lock) 1.4b and 2.0b
USB 2.0 Port	x 2 (Celeron SKU) - (Core i SKU)
USB 3.0 Port	x 1 (Celeron SKU) x 3 (Core i SKU)
eSATA Port	-
RJ45 LAN Jack	x 1
Audio Set	Line-out    -
	Line-in    -
Antenna Holes	x 2 (Dual band antenna)
Kensington Lock	x 1
Others	x 1 Extended Power Switch

## Watchdog Timer

<b>Adapter</b>	19V/65W AC adapter (Celeron sku) 19V/90W AC adapter (Core i3 sku)
----------------	--

<b>Input Voltage</b>	AC 100 ~240 V
----------------------	---------------

## Environment

<b>MTBF</b>	50,000 hrs
<b>Operating temperature</b>	0 ~40 °C
<b>Storage temperature</b>	-30 ~60 °C
<b>Relative Humidity</b>	-90% RH