
INSTALLATION INSTRUCTIONS

FSB-018

FLAT SCREEN TABLE STAND

The Flat Screen Table Stand is designed to attach directly to VESA FDMI standard 75mm or 100mm mounting pattern.

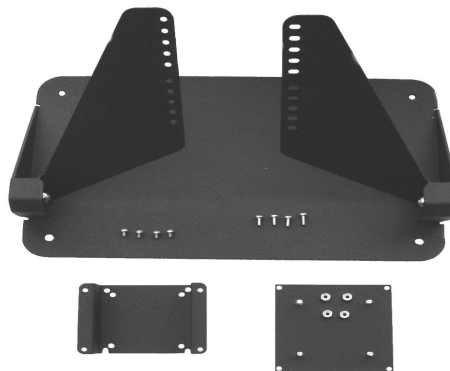


Figure 1

- | | |
|--------------------------------------|-----------------------------------|
| (1) FSB-018 Stand Assembly | (4) M4 x 10mm Phillips Head Screw |
| (1) 75mm Adapter Bracket | (4) M4 x 6mm Phillips Head Screw |
| (1) 100mm Adapter Bracket | (4) 10-24 Nylock Nut |
| (4) 10-24 x 3/8" Phillips Head Screw | |

Unpack and check contents: Inspect the Flat Screen Table Stand carefully for shipping damage. If any damage is apparent, call your carrier claims agent.

CAUTION: The maximum weight to be installed on the FSB018 is 20 lbs (9 kg). Do not use a power screwdriver to install screws. Use a hand screwdriver to prevent damage to your monitor.

NOTE: For 75mm VESA mounting, perform Step 1 first. For 100mm VESA mounting, perform Step 2 and Step 3 first.

For 75mm VESA Mounting Pattern

1. Secure the 75mm adapter bracket to your monitor using four M4 x 6mm Phillips head screws (provided) (see Figure 2).

For 100mm VESA Mounting Pattern

2. Install 100mm adapter bracket using four provided M4 x 6mm or M4 x 10 Phillips head screws (see Figure 3).
3. Secure the 100mm adapter bracket to the 75mm adapter bracket (see Figure 4).

®Chief is a registered trademark of Milestone AV Technologies. All rights reserved.

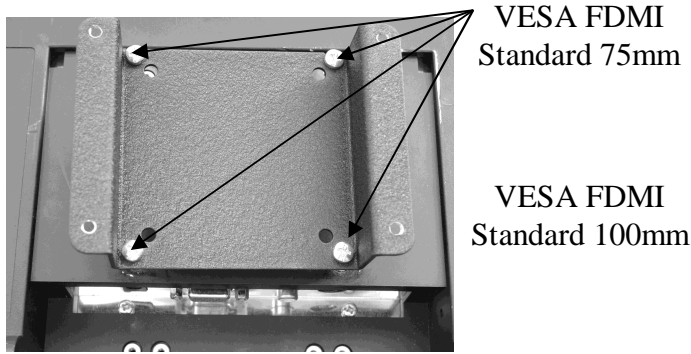


Figure 2. 75mm Bracket Installation

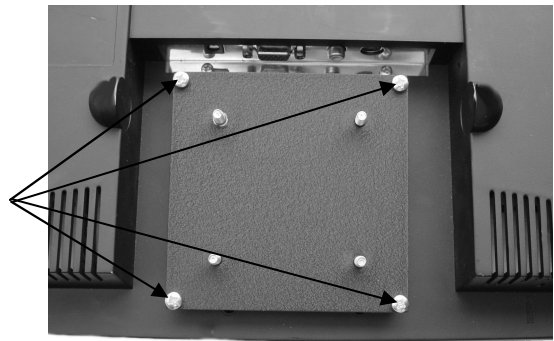


Figure 3. 100mm Bracket Installation

- At the desired height, secure your monitor to the stand using four provided 10-24 x 3/8" Phillips head screws (see Figure 5).

100mm Adapter Bracket

75mm Adapter Bracket

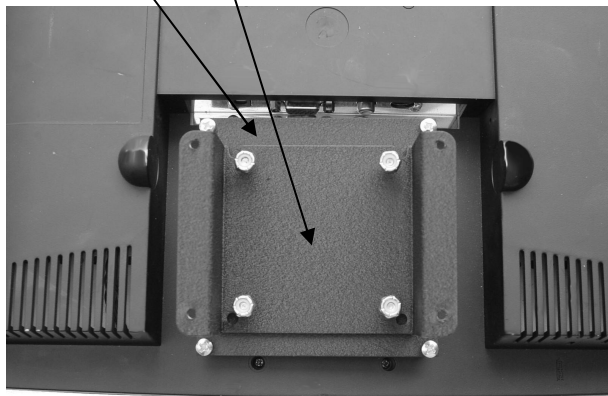


Figure 4. 100mm to 75mm Installation

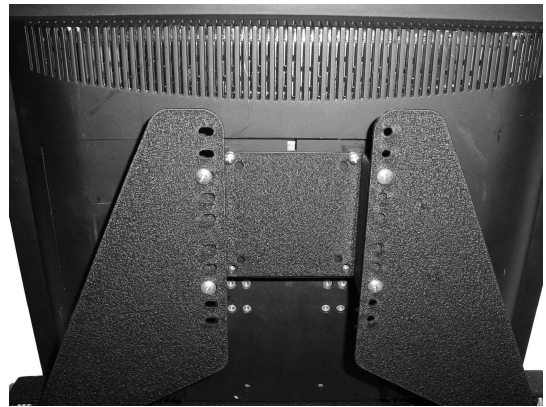


Figure 5. Install Monitor to Stand

