


CS01 65" / 75" / 86" Corporate Display Series



Features

- Cast and control your presentations with ease
- Meet using Zoom and other conferencing apps
- Collaborate using intuitive meeting tools
- Sync and display all your meeting schedules
- Conveniently manage devices and push alerts

Input and Output Terminals

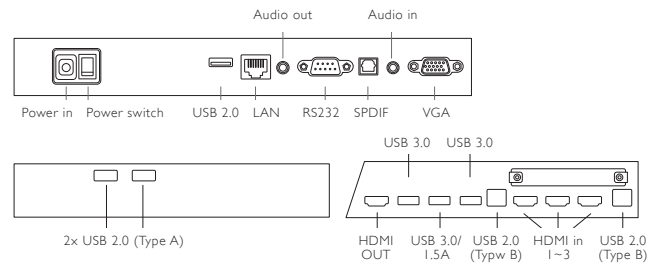

Specifications

Model		CS6501	CS7501	CS8601	
Panel	Screen Size	65"	75"	86"	
	Resolution	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	
	Brightness (Typ.)	450	450	450	
	Contrast Ratio (Typ.)	1200 : 1	1200 : 1	1200 : 1	
	Viewing Angle (H/V)	178 degree (H) 178 degree (V)	178 degree (H) 178 degree (V)	178 degree (H) 178 degree (V)	
	Response Time (G-t-G)	8	8	8	
	Backlight Life (hrs)	30,000	30,000	30,000	
	Panel Surface	AG, Haze 25%	AG, Haze 25%	AG, Haze 28%	
	Operating Hour	18 hrs / 7 days	18 hrs / 7 days	18 hrs / 7 days	
	Orientation	Landscape	Landscape	Landscape	
Power	Type	Internal	Internal	Internal	
	Power Supply	100V~240V, 50-60Hz	100V~240V, 50-60Hz	100V~240V, 50-60Hz	
	Power Consumption	Maximum (W/h)	400 W	450 W	550 W
		Typical (W/h)	200 W	245 W	330 W
		Standby Mode (W/h)	≤0.5 W	≤0.5 W	≤0.5 W
AC Power Switch	I	I	I		
Environment	Wake up	VGA / HDMI / LAN	VGA / HDMI / LAN	VGA / HDMI / LAN	
	Operation Temperature	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C	
	Operating Humidity	10% ~ 90% RH Non-Condensing	10% ~ 90% RH Non-Condensing	10% ~ 90% RH Non-Condensing	
Connectivity	Input	VGA	x1	x1	x1
		HDMI	2.0 x3	2.0 x3	2.0 x3
	Output	HDMI	2.0 x1	2.0 x1	2.0 x1
		USB	Type A 2.0 x 3 3.0 x 3	2.0 x 3 3.0 x 3	2.0 x 3 3.0 x 3
		Type B	x 2	x 2	x 2
		RS232	Yes	Yes	Yes
	RJ45	Yes	Yes	Yes	
	Remote Controller	Yes	Yes	Yes	
Audio	Internal Speaker	10 W x 2	10 W x 2	16 W x 2	
Mechanical	Dimension (mm)	Screen 1450.6 x 828.1 x 90.2	Screen 1672.2 x 954.9 x 86.7	Screen 1930.8 x 1109.3 x 82.8	
	Weight (kg)	Screen	26.95	33.3	54.3
		Package	40.9	49	77.1
	Bezel Width (mm)	8.8 / 12.8 / 8.8 / 8.8	9 / 13.3 / 9 / 9	13.9 / 23.4 / 13.9 / 13.9	
	Wall Mounting (VESA) (Screw Type /Max. Length)	400 x 200 (4 holes); M6*10L	400 x 200 (4 holes); M8*15L	600 x 400 (4 holes); M8*20L	
	OPS Slot	Yes	Yes	Yes	

