



No Driver Needed

No drivers needed—just plug in and join online meeting instantly.

 \star Supports Windows, macOS, Linux, or ChromeOS systems.



No App Download Required

No software or app required—just plug in and instantly share content during your meeting.



No Network Setup Required

No complex network setup or IT help needed. Receiver, Multimedia Hub and Button pair automatically—just plug and play to start presenting instantly.



Direct Touch Control on Display

Control content right from the interactive display—no interruptions, just smooth and natural interaction.



Specifications

Features

HDMI Video Outputs	HDMI 2.x (with HDCP), Up to 4K 60Hz
USB-C Video Outputs	DP 1.2 (with HDCP), Up to 1080P 60Hz
ВУОМ	Driver-Free Video conference
BYOD	Apple OS/Android/Windows
TouchBack	Yes
WiFi Standard	6
Wireless Frequency	2.4G + 5G
Wireless Data Rate (Maximum)	AX3000 (2.4G + 5G 3,000 Mbps)
Simultaneous Connections	64
WiFi Protected Access	WPA3 Enterprise**
Advanced Encryption Standard	AES128
Transmission Distance	40m

^{**}Upgrade from WPA3 to WPA3 Enterprise in Q1 2026.

Receiver

Power Supply	3A, DC 12V±10%
Normal Power Consumption	15w
LAN (RJ45)	(x1)
HDMI Port	(x1)
USB-C Port	(x1)
Dimensions without Antenna	W123 x D123 x H49.9 mm (w/o feet)
Weight	300g

Multimedia Hub

Power Supply	1.5A, DC 12V±10%
Normal Power Consumption	3.9W
USB-C Port	(x1)
USB-A Port	(x1)
Dimensions without Antenna	W98 x D78 x H25.1 mm (w/o feet)
Weight	90g

Host Button

Connector Type	USB Type C (Default)***
Function Key	Split Screen Key

^{***}Switchable between Type C and HDMI

Button

Connector Type	USB Type C (Default)***
Function Key	Split Screen Key

^{***}Switchable between Type C and HDMI

Product Content

Receiver	(x1)
Button	(x1)
Host Button	(x1)
Multimedia Hub	(x1)
Cradle	(x1)
Power Adapter	(x2)
Antenna	(x2), 2dbi
HDMI Cable	(x1)
Button HDMI Cable	(x1)


Cradle

Weight (Net)	555g
Dimension	W84.5 x D128 x H62 mm (w/o feet)



benq.eu/en-eu/business/wireless-presentation /instashow-wireless-collaboration.html

Dimensions & Connectivity

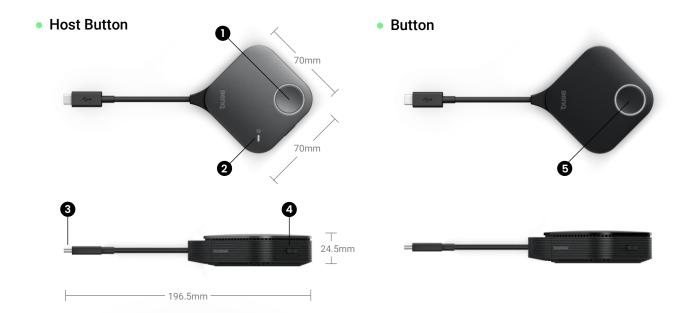


Receiver





Multimedia Hub





1. Present Key

5. Present Key

9. RJ45

13. USB-C for Touchback / DP / PD-IN

2. Multimedia LED

6. Standby On/Off

10. Power Switch

14. Multimedia LED

3. USB-C Connector

7. PAIRING Key

11. HDMI Out

15. Power Port

4. Split Screen Key

8. USB-A for Touchback

12. Kensington Lock

16. Reset

© 2025 BenQ Corp. Specification may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

